

Modular range

LED blocks for front mounting



MLBL-00W


1SFC151417V0001

Color	Rated current mA	Wavelength nm	Luminance mcd	Type	Order code	Pkg qty	Weight (1pce) kg
Rated voltage 230 V AC							
Red	10.0	620	250	MLBL-07R	1SFA611621R1071	10	0.012
Green	10.0	520	1500	MLBL-07G	1SFA611621R1072	10	0.012
Yellow	10.0	588	300	MLBL-07Y	1SFA611621R1073	10	0.012
Blue	10.0	468	450	MLBL-07L	1SFA611621R1074	10	0.012
White	10.0	(1)	600	MLBL-07W	1SFA611621R1075	10	0.012
Rated voltage 230 V AC high anti-inductive voltage (2)							
Red	10.0	620	250	MLBL-99R	1SFA611621R1991	10	0.012
Green	10.0	520	1500	MLBL-99G	1SFA611621R1992	10	0.012
Yellow	10.0	588	300	MLBL-99Y	1SFA611621R1993	10	0.012
Blue	10.0	468	450	MLBL-99L	1SFA611621R1994	10	0.012
White	10.0	(1)	600	MLBL-99W	1SFA611621R1995	10	0.012
Rated voltage 380 V AC							
Red	10.0	620	250	MLBL-08R	1SFA611621R1081	10	0.012
Green	10.0	520	1500	MLBL-08G	1SFA611621R1082	10	0.012
Yellow	10.0	582	300	MLBL-08Y	1SFA611621R1083	10	0.012
Blue	10.0	468	450	MLBL-08L	1SFA611621R1084	10	0.012
White	10.0	(1)	600	MLBL-08W	1SFA611621R1085	10	0.012
Rated voltage 415 V AC							
Red	11	620	280	MLBL-09R	1SFA611621R1091	10	0.012
Green	11	520	1800	MLBL-09G	1SFA611621R1092	10	0.012
Yellow	11	588	350	MLBL-09Y	1SFA611621R1093	10	0.012
Blue	11	468	500	MLBL-09L	1SFA611621R1094	10	0.012
White	11	(1)	650	MLBL-09W	1SFA611621R1095	10	0.012

Note: care should be taken for DC supply where + and - must be correctly connected. This is marked X1 (+) and X2 (-) on the product.

(1) X=0.31, Y=0.32 according to the ICI Chromaticity diagram.

(2) Higher threshold to light up LED to be used in application where there is risk of large induced voltages.

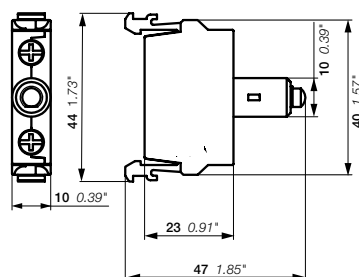

MLBL

Dimensions (mm, inches)